



I ROCK

 **Abita**<sup>TM</sup>  
ceramiche italiane

COMFORT, DESIGN, ECOSOSTENIBILITÀ. Il marchio Abita, sintesi di un'esperienza imprenditoriale nata nel 1950, propone superfici di ultima generazione, progettate per elevare la qualità dell'abitare contemporaneo. Questi materiali sono ecocompatibili, di facile pulizia e lunga durata, con una estetica equilibrata che esprime il meglio dello stile italiano.



 **Abita**<sup>TM</sup>  
**ceramiche italiane**

COMFORT, STYLE, ECOSUSTAINABILITY The Abita brand, drawing on experience in the business reaching back to 1950, offers latest-generation coverings, designed to raise the quality of contemporary living space. These materials are eco-friendly, easy to clean and durable, with attractive design that expresses the best of Italian style.

CONFORT, DESIGN, DÉVELOPPEMENT DURABLE. La marque Abita, synthèse d'une expérience entrepreneuriale qui a vu le jour en 1950, propose des surfaces de dernière génération, conçues pour améliorer la qualité des habitations contemporaines. Ces matériaux sont écologiques, facilement nettoyables et durables, et leur esthétique équilibrée exprime le meilleur du style italien.

KOMFORT, DESIGN, NACHHALTIGKEIT. Die 1950 gegründete Marke Abita bietet Keramikflächen der jüngsten Generation, die einen Qualitätssprung im zeitgemäßen Wohnen

herbeiführen. Die umweltverträglichen, reinigungsfreundlichen und langlebigen Materialien zeichnen sich durch eine ansprechende Optik aus, die vorbildlich italienisches Design verkörpert.

CONFORT, DISEÑO, ECOSOSTENIBILIDAD. La marca Abita, síntesis de una experiencia empresarial nacida en 1950, propone superficies de última generación proyectadas para elevar la calidad del vivir contemporáneo. Estos materiales, ecocompatibles, fáciles de limpiar y de larga duración, presentan una estética equilibrada que expresa lo mejor del estilo italiano.


КОМФОРТ, ДИЗАЙН, ЭКОЛОГИЧЕСКАЯ РАЦИОНАЛЬНОСТЬ. Марка Abita, сущность предпринимательского опыта, появившаяся на свет в 1950 году, предлагает плитку последнего поколения, созданную для повышения качества современной жизни. Эти материалы являются экологически совместимыми, легко очищаемыми и долговечными, со сбалансированной эстетикой, выражающей самое лучшее из итальянского стиля.




I ROCK



GRIGIO

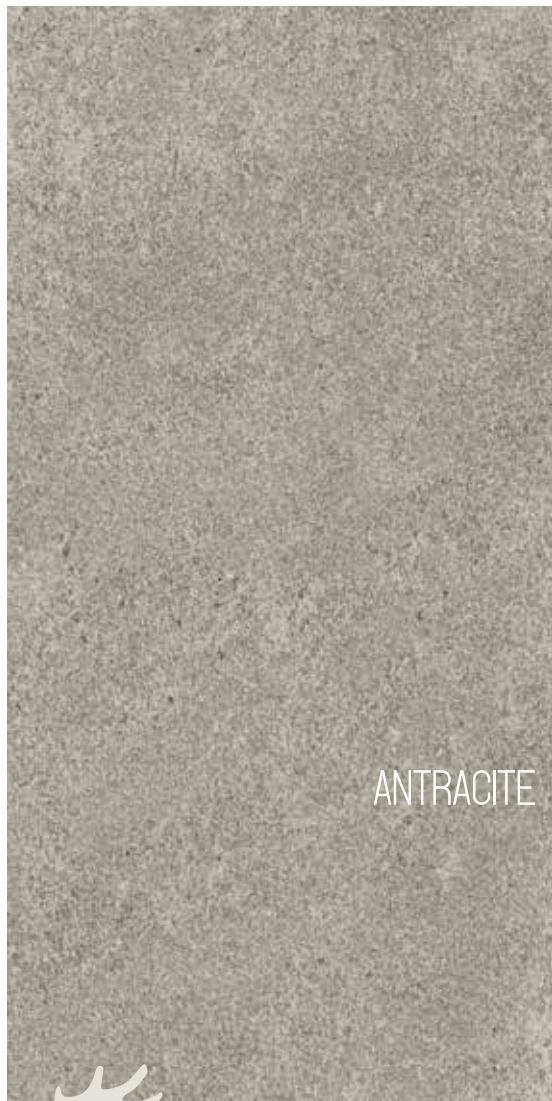

ANTRACITE

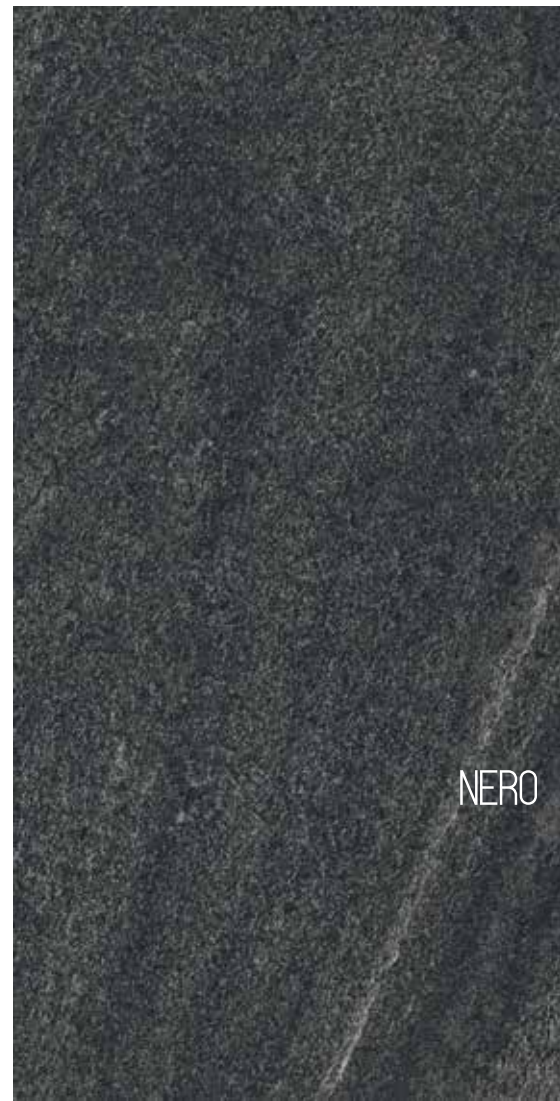

NERO



# 5

COLORI  
COLOURS  
COULEURS  
FARBEN  
COLORES  
ЦВЕТА

I ROCK, attraverso le sue 5 colorazioni, esprime la perfetta integrazione tra essenza e tecnologia, enfatizzando il valore espressivo frutto di una attenta scelta progettuale.

With its 5 colour shades, I ROCK expresses the perfect integration of essence and technology, fully exploiting the expressive force achieved through meticulous design work.

À travers ses 5 colorations, I ROCK exprime la parfaite intégration de l'essence et de la technologie. Elle vient en souligner la valeur expressive, fruit d'un choix longuement mûri en termes de conception.

Die Serie I ROCK in fünf Farbnuancen ist das eindrucksvolle Resultat einer akkuraten Stilrecherche. Naturmaterial und Technologie gehen eine vollendete Symbiose ein.

I ROCK, a través de sus cinco coloraciones, expresa la suma perfecta de materia y tecnología, poniendo de relieve un valor expresivo que es fruto de una trabajada idea proyectiva.

Своими 5 цветами I ROCK выражает полную интеграцию между деревом и технологией, подчеркивая экспрессивную ценность, являющуюся результатом тщательного выбора, совершенного в рамках проекта.



BIANCO




BROWN


# I ROCK




FORMATI  
SIZE  
FORMATS  
FORMATEN  
FORMATOS  
ΦΟΡΜΑΤΥ

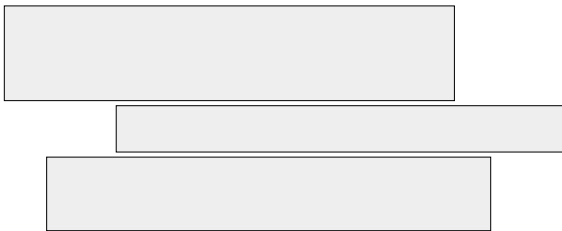


**Muretto 30x60**  
11<sup>13/16</sup>x23<sup>5/8</sup>

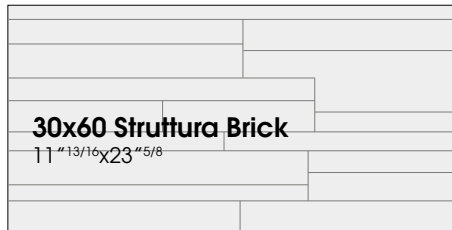


**30x60 Struttura Brick**  
11<sup>13/16</sup>x23<sup>5/8</sup>

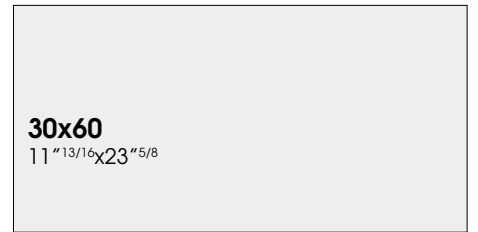

**30x60**  
11<sup>13/16</sup>x23<sup>5/8</sup>

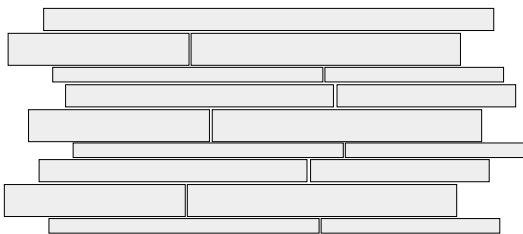

**Mattoncino 30x60**  
11<sup>13/16</sup>x23<sup>5/8</sup>



**Mosaico 30x30**  
11<sup>13/16</sup>x11<sup>13/16</sup>



**60x60**  
23<sup>5/8</sup>x23<sup>5/8</sup>

GRIGIO



SHOP



GRIGIO / 30x60 / muretto 30x60







NERO



NERO / 60x60



ANTRACITE





ANTRACITE /  
30x60









BIANCO



BROWN



BROWN/BIANCO  
30x60/mattoncino





OUTDOOR



Grigio  
30x60 outdoor

# I ROCK / grigio

± 10,5 mm  
**cm 60x60**  
 inch 23<sup>5/8</sup>x23<sup>5/8</sup>

± 9,5 mm  
**cm 30x60**  
 inch 11<sup>13/16</sup>x23<sup>5/8</sup>



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 130 NT** Grigio

07  
 1020





DIN 51130  
R11  
DIN 51097  
A+B+C  
B.C.R.A.  
Dry > 0.40  
Wet > 0.40

30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 135 AS** Grigio Antislip

07  
 1025

DCOF  
 Wet ≥ 0.42



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 136 NT** Struttura Brick Grigio

07  
 3060




30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 133K** Muretto 3 pz. Grigio

04  
 3060



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 117 NT** Mattoncino Grigio

04  
 3125



30x30 / 11<sup>13/16</sup>x11<sup>13/16</sup>  
**IR 115K** Mos. 5x5 Grigio

DIN 51130  
  
 R10  
 DIN 51097  
  
 A+B  
 10  
 3105



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 130 RT** Grigio Rettificato


07  
 1040



60x60 / 23<sup>5/8</sup>x23<sup>5/8</sup>  
**IR 160 RT** Grigio Rettificato

03  
 1060

## PEZZI SPECIALI Trims / Formteile / Pièces spéciales / Piezas especiales / Специальные изделия.



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR G10 NT** Gradino Inciso Grigio

04  
 380



7x60 / 2<sup>3/4</sup>x23<sup>5/8</sup>  
**IR B10 NT** Battiscopa Grigio

15  
 220



# I ROCK / antracite



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 230 NT** Antracite

07  
 1020

**AntiSlip**  
 DIN 51130  
 R11  
 DIN 51097  
 A+B+C  
 B.C.R.A.  
 Dry > 0.40  
 Wet > 0.40  
 DCOF  
 Wet ≥ 0.42

30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 235 AS** Antracite Antislip

07  
 1025



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 236 NT** Struttura Brick Antracite

07  
 3060




30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 233K** Muretto 3 pz. Antracite

04  
 3060



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 227 NT** Mattoncino Antracite

04  
 3125




30x30 / 11<sup>13/16</sup>x11<sup>13/16</sup>  
**IR 225K** Mos. 5x5 Antracite

DIN 51130  
 R10  
 DIN 51097  
 A+B  
 10  
 3105



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 230 RT** Antracite Rettificato


07  
 1040

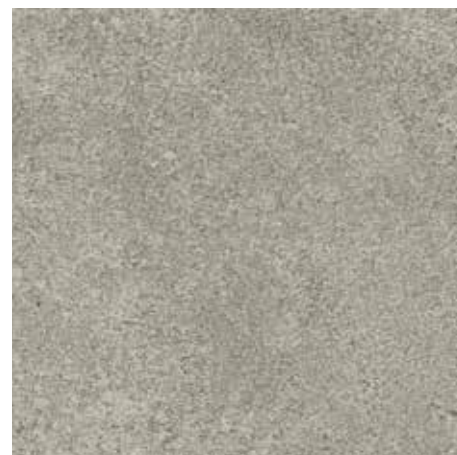

60x60 / 23<sup>5/8</sup>x23<sup>5/8</sup>  
**IR 260 RT** Antracite Rettificato

03  
 1060

## PEZZI SPECIALI Trims / Formteile / Pièces spéciales / Piezas especiales / Специальные изделия.

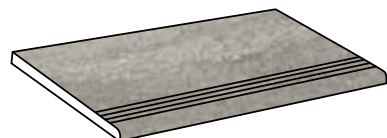


30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR G20 NT** Gradino Inciso Antracite

04  
 380



7x60 / 2<sup>3/4</sup>x23<sup>5/8</sup>  
**IR B20 NT** Battiscopa Antracite

15  
 220

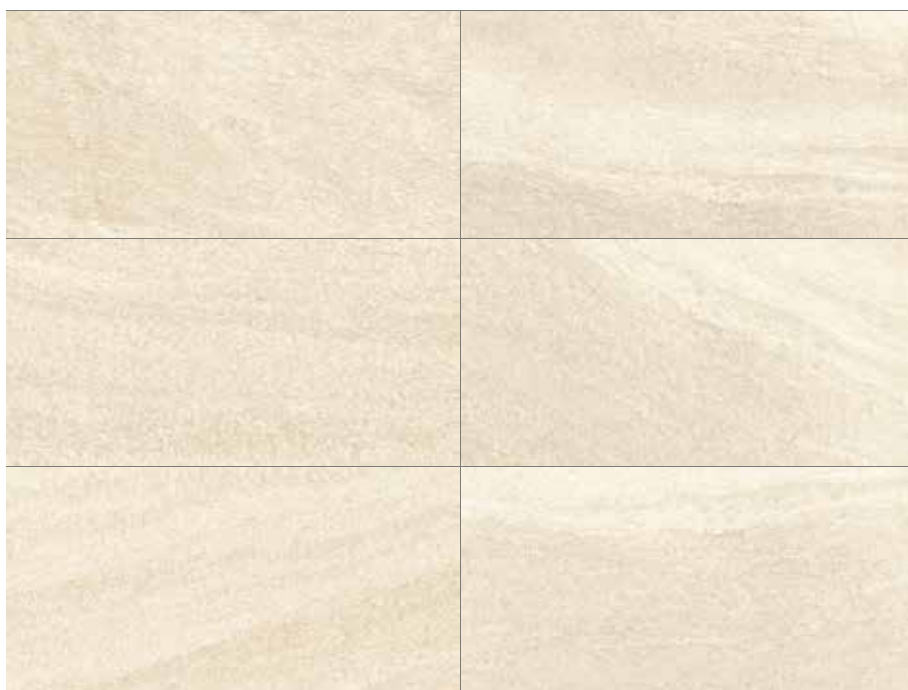

30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 830 NT** Bianco

07  
 1026



DIN 51130  
 R11  
 DIN 51097  
 A+B+C  
 B.C.R.A.  
 Dry > 0.40  
 Wet > 0.40  
 DCOF  
 Wet ≥ 0.42

30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>

**IR 835 AS** Bianco Antislip

07  
 1026



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>

**IR 836 NT** Struttura Brick Bianco

07  
 3060



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>

**IR 833K** Muretto 3 pz. Bianco


04  
 3060



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>

**IR 887 NT** Mattoncino Bianco

04  
 3125



30x30 / 11<sup>13/16</sup>x11<sup>13/16</sup>

**IR 885K** Mos. 5x5 Bianco

DIN 51130  
  
 R10  
 DIN 51097  
  
 A+B  
 10  
 3105



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>

**IR 830 RT** Bianco Rettificato

07  
 1040




60x60 / 23<sup>5/8</sup>x23<sup>5/8</sup>

**IR 860 RT** Bianco Rettificato

03  
 1060

**PEZZI SPECIALI** Trims / Formteile / Pièces spéciales / Piezas especiales / Специальные изделия.

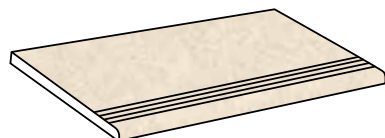

30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>

**IR G80 NT** Gradino Inciso Bianco

04  
 380



7x60 / 2<sup>3/4</sup>x23<sup>5/8</sup>

**IR B80 NT** Battiscopa Bianco

15  
 220



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 930 NT** Nero PEI IV

07  
 1020

**AntiSlip**  
 DIN 51130  
 R11  
 DIN 51097  
 A+B+C  
 B.C.R.A.  
 Dry > 0.40  
 Wet > 0.40  
 DCOF  
 Wet ≥ 0.42

30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 935 AS** Nero Antislip

07  
 1025




30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 933K** Muretto 3 pz. Nero

04  
 3060



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 997 NT** Mattoncino Nero

04  
 3125



30x30 / 11<sup>13/16</sup>x11<sup>13/16</sup>  
**IR 995K** Mos. 5x5 Nero

DIN 51130  
 R10  
 DIN 51097  
 A+B  
 10  
 3105



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 930 RT** Nero Rettificato PEI IV


07  
 1040



60x60 / 23<sup>5/8</sup>x23<sup>5/8</sup>  
**IR 960 RT** Nero Rettificato PEI IV

03  
 1060

**PEZZI SPECIALI** Trims / Formteile / Pièces spéciales / Piezas especiales / Специальные изделия.

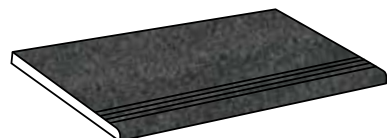

30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR G90 NT** Gradino Inciso Nero

04  
 380



7x60 / 2<sup>3/4</sup>x23<sup>5/8</sup>  
**IR B90 NT** Battiscopa Nero

15  
 220

# I ROCK / brown



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 630 NT** Brown

07  
 1020



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 633K** Muretto 3 pz. Brown

04  
 3060



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 667 NT** Mattoncino Brown

04  
 3125



30x30 / 11<sup>13/16</sup>x11<sup>13/16</sup>  
**IR 665K** Mos. 5x5 Brown

DIN 51130  
 R10  
 DIN 51097  
 A+B  
 10  
 3105



30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR 630 RT** Brown Rettificato


07  
 1040



60x60 / 23<sup>5/8</sup>x23<sup>5/8</sup>  
**IR 660 RT** Brown Rettificato

03  
 1060

## PEZZI SPECIALI Trims / Formteile / Pièces spéciales / Piezas especiales / Специальные изделия.

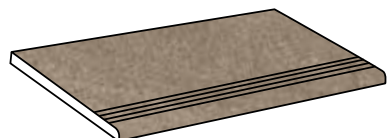

30x60 / 11<sup>13/16</sup>x23<sup>5/8</sup>  
**IR G60 NT** Gradino Inciso Brown

04  
 380






7x60 / 2<sup>3/4</sup>x23<sup>5/8</sup>  
**IR B60 NT** Battiscopa Brown

15  
 220

# IMBALLI E PESI

Packaging and weights / Verpackungen und Gewichte / Emballages et poids / Embalajes y pesos / Упаковка и вес

	 <b>SCATOLA / BOX</b>			 <b>PALLET</b>			
	pz	m2	kg	box	m2	kg	
60x60 RT (Rettificato)	3	1,080	23,10	40	43,200	924	10,5
30x60 RT (Rettificato)	7	1,260	25,97	40	50,400	1.039	10,5
30x60	7	1,260	24,60	40	51,200	984	9,5

## MERCHANDISING



Riepiogativo



Bianco / Brown



Grigio



Antracite



Nero



SCA-IR



COLORATO NELLA MASSA  
FULL-BODY COLOURED  
IN DER MASSE GEFÄRBT  
COLORE DANS LA MASSE  
COLOREADO EN LA MASA  
ОКРАЩЕННЫЙ В МАССЕ



RESISTENZA ALL'USURA  
ABRASION RESISTANCE  
ABRIEBFESTIGKEITGRUPPE  
RESISTANCE A L'USURE  
RESISTENCIA AL TRANSITO  
ИЗНОСОСТОЙКОСТЬ  
**PEI V - PEI IV**



RESISTENZA ALLA SCIVOLOSITÀ  
SLIP RESISTANCE  
RUTSCHFESTIGKEIT  
CAPACITE ANTIDERAPANTE  
RESISTENCIA AL DESLIZAMIENTO  
СОПРОТИВЛЕНИЕ СКОЛЬЖЕНИЮ  
**R10 / DIN 51097 A+B**  
**B.C.R.A. Dry > 0.40 - Wet >- 0.40**  
**DCOF Wet ≥ 0.42**



ALTO SPESSORE  
HIGH THICKNESS  
VERSTÄRKT SCHERBEN  
ESPESSEUR MAJORE  
ALTO ESPESOR  
ВЫСОКАЯ ТОЛЩИНА



RESISTENTE AGLI ACIDI  
ACID RESISTANT  
SÄUREFESTIGKEIT  
RESISTANT AUX ACIDES  
RESISTENCIA A LOS ACIDOS  
КИСЛОТОСТОЙКОСТЬ



MODERATA VARIAZIONE  
MODERATE VARIATION  
MÄSSIGE ABWEICHUNG  
VARIATION MODEREE  
MODERADA VARIACIÓN  
ОГРАНИЧЕННЫЕ ИЗМЕНЕНИЯ



FACILE PULIBILITÀ  
EASY TO CLEAN  
PFLEGELEICHT  
FACILE A NETTOYER  
FÁCIL DE LIMPIAR  
ЛЕГКАЯ ЧИСТКА



RESISTENZA AL GELO  
FROST RESISTANCE  
FROSBESTÄNDIGKEIT  
RESISTENCIA AL GEL  
МОРОЗОСТОЙКОСТЬ


**CREDITS**

coordinamento: **MKT NOVABELL**  
progetto e stampa: **EPHEMERIS**

## The International reference standards: ANSI - ASTM **IROCK naturale**

The values of the main technical characteristics measured on our products, compared with international standards, are clearly shown and reproduced on our contractual documents (catalogs, price lists, etc.).


The values given in this document are common to groups of articles or series of our tiles and therefore are to be used as a guide for a first orientation in choosing the product. If required, the specific values for a given product of a determined supply can be provided depending on its intended use, when formally brought to our attention by notice in writing.

Characteristics and Test methods 	Requirements ANSI A 137.1	Our general values
Determination of water absorption - (ASTM C 373)	Average value $E_b \leq 0,5 \%$	Average value $\leq 0,5\%$
<b>Classification</b>	<b>Definition § 3.0</b>	<b>Porcelain tiles</b>
		<b>Physical properties</b>
Breaking strength - (ASTM C 648)	Average $\geq 250$ lbf (1.11 kN) Individual $\geq 225$ lbf (1.00 kN)	Complies
Visible abrasion - (ASTM C 1027)	As reported	PEI 4 : Nero PEI V : Bianco -Grigio- Antracite - Marrone
Thermal shock resistance (ASTM C 428)	Pass	Complies
Crazing resistance (ASTM C 424)	Pass	Complies
Resistance to freeze/thaw cycling (ASTM C 1026)	As reported	Resistant
<b>DCOF Resistance</b> (ANSI A 137.1 Section 9.6)	$\geq 0.42$ <sup>(1)</sup>	DCOF $\geq 0.42$
Bond strength (ASTM C 482)	$\geq 50$ psi (0.34 MPa)	$> 1$ MPa
Color Uniformity (ASTM C 609 and ANSI A 137.1 Section 9.3) <sup>(2)</sup>	V0 - 3 Juds	See the specific section
		<b>Chemical properties</b>
Chemical resistance (ASTM C 650)	As reported	Resistant
Stain resistance (ASTM C 1378)	As reported	Resistant
		<b>Dimensions - Calibrated tiles</b>
Dimensions - (ASTM C 499) - (ASTM C 485) - (ASTM C 502)	See ANSI A 137.1 - Tab.10	Complies
		<b>Dimensions - Rectified tiles</b>
Dimensions - (ASTM C 499) - (ASTM C 485) - (ASTM C 502)	See ANSI A 137.1 - Tab.10	Complies

(1) For level interior spaces expected to be walked upon when wet - (2) For V0 tiles only



**IROCK  
NATURALE**


 Utilizzare il **QR CODE** per scaricare le schede tecniche


 Use the **QR CODE** to download data sheets


 **QR CODE** benutzen um die technische datenblätter runter zu laden



**IROCK  
ANTISLIP**

 Veuillez utiliser le **QR CODE** pour télécharger les fiches techniques

 Utilizar el **QR CODE** para descargar las fichas técnicas


 Используйте QR-код для скачивания технических характеристик



## The international reference standards: ISO - EN **IROCK naturale**

The values of the main technical characteristics measured on our products, compared with international standards, are clearly shown and reproduced on our contractual documents (catalogs, price lists, etc.).


The values given in this document are common to groups of articles or series of our tiles and therefore are to be used as a guide for a first orientation in choosing the product. If required, the specific values for a given product of a determined supply can be provided depending on its intended use, when formally brought to our attention by notice in writing.


Characteristics and Test methods 	Requirements EN 14411 <sup>(1)</sup> – G / ISO 13006 <sup>(2)</sup> - G	Our general values
Determination of water absorption - (ISO 10545-3)	Average value $E_w \leq 0,5\%$ / Individual maximum 0,6%	Average value and individual maximum < 0,5%
<b>Classification</b>	<b>Definition § 3.2 and § 3.7</b>	<b>BI<sub>a</sub> – Porcelain tiles</b>
		<b>Physical properties</b>
Modulus of rupture - (ISO 10545-4)	Average $\geq 35 \text{ N/mm}^2$	$\geq 35 \text{ N/mm}^2$
Breaking strength - (ISO 10545-4)	Average $\geq 1300 \text{ N}$ for thickness $\geq 7,5 \text{ mm}$ Average $\geq 700 \text{ N}$ for thickness < 7,5 mm	Complies
Abrasion resistance - (ISO 10545-7)	Abrasion class and cycles passed	PEI 4 : Nero PEI V : Bianco -Grigio- Antracite - Marrone
Coefficient of linear thermal expansion (ISO 10545-8)	Declared value <sup>(1)</sup> / Test method available <sup>(2)</sup>	$< 7,1 \times 10^{-6} \text{ }^\circ\text{C}^{-1}$
Thermal shock resistance (ISO 10545-9)	Pass according to EN ISO 10545-1 <sup>(1)</sup> / Test method available <sup>(2)</sup>	Complies
Crazing resistance (ISO 10545-11)	Pass according to EN ISO 10545-1 <sup>(1)</sup> / Required <sup>(2)</sup>	Complies
Frost resistance (ISO 10545-12)	Pass according to EN ISO 10545-1 <sup>(1)</sup> / Required <sup>(2)</sup>	Complies
Moisture expansion (ISO 10545-10)	Declared value <sup>(1)</sup> / Test method available <sup>(2)</sup>	$\leq 0,2 \text{ mm/m}$
Small colour differences (ISO 10545-16)	$\Delta E_{cmc} < 0,75^{(1)}$	If agreed
Impact resistance - (ISO 10545-5)	Declared value <sup>(1)</sup> / Test method available <sup>(2)</sup>	COR > 0,75
Reaction to fire	Class A1 or A1 <sub>FL</sub> <sup>(1)</sup>	A1 <sub>FL</sub> Classified Without Testing (CWT) – 96/603
		<b>Chemical properties</b>
Chemical resistance -(GL) (ISO 10545-13)		
Resistance to low and high concentrations of acids and alkalis	Declared value <sup>(1)</sup> / Manufacturer is to state classification <sup>(2)</sup>	Resistant (see "Maintenance and care" section)
Resistance to household chemicals and swimming pool salts	Minimum class B	G A
Resistance to staining (ISO 10545-14)	Minimum class 3	5 (see "Maintenance and care" section)
Release of dangerous substances (ISO 10545-15)	Declared value <sup>(1)</sup> / Test method available <sup>(2)</sup>	$Pb < 0,1 / Cd < 0,01 \text{ mg/dm}^2$
		<b>Dimensions and surface quality</b>
Dimensions - (ISO 10545-2)	See ANNEX G	Complies
Surface quality - (ISO 10545-2 § 7)	<b>A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles</b>	Complies


(1) Requirements according to EN 14411

(2) Requirements according to ISO 13006


Test methods	Requirements and references	Our general values
Determination of anti-slip properties – Workrooms and fields of activities with raised slip danger, walking method- Ramp test (DIN 51130) – Germany	BGR / ASR From R9 to R13	R 10
Determination of anti – slip properties. Wet-loaded barefoot areas – Walking method – Ramp test (DIN 51097) - Germany	GUV-I 8527 A – B – C	A + B
Dynamic Coefficient Friction wet and dry condition (BCR – ex BCRA) Italy	DM n. 236 / 1989 $\mu > 0,40$	$\mu > 0,40$


 La tabella in italiano con i dati tecnici è scaricabile su [www.abitaceramiche.it](http://www.abitaceramiche.it)

 The English language technical specification for each collection can be downloaded from [www.abitaceramiche.it](http://www.abitaceramiche.it)

 Die Tabelle in deutscher Sprache kann auf [www.abitaceramiche.it](http://www.abitaceramiche.it) heruntergeladen werden.

 Si vous le souhaitez, téléchargez le tableau contenant les données techniques en français en allant sur [www.abitaceramiche.it](http://www.abitaceramiche.it)

 Descargue la tabla de datos técnicos en español, disponible en [www.abitaceramiche.it](http://www.abitaceramiche.it)

 Таблицу на русском языке с техническими данными можно скачать с сайта [www.abitaceramiche.it](http://www.abitaceramiche.it)



**ABITA Ceramiche Italiane**

Via Cimabue, 1 - 42014 Castellarano (RE)

Tel. +39.0536.851606 - Fax +39.0536.1851060

[www.abitaceramiche.it](http://www.abitaceramiche.it)

